

SWEEPER


attachments



One Tough Animal

SPECIFICATIONS

Clean Up In Both Directions.

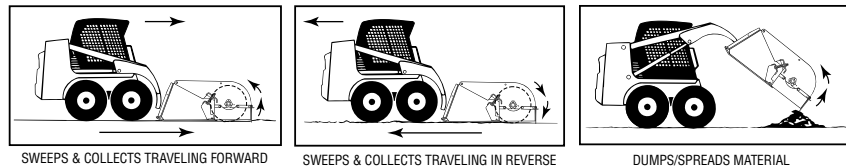

Specifications	44"	54"	60"	72"
Sweep Width	44 in. (1118 mm)	54 in. (1372 mm)	60 in. (1524 mm)	72 in. (1829 mm)
Overall Attachment Width	48.8 in. (1240 mm)	60.2 in. (1529 mm)	66.2 in. (1681 mm)	78.2 in. (1986 mm)
Weight	573 lb. (260 kg)	696 lb. (316 kg)	758 lb. (344 kg)	845 lb. (383 kg)
Bucket Capacity	6.1 cu. ft. (0,18 cu. m.)	10.8 cu. ft. (0,31 cu. m.)	12.0 cu. ft. (0,34 cu. m.)	14.4 cu. ft. (0,41 cu. m.)
Broom Diameter	← 21.4" (544 mm) →			
Bristle Material	← Replaceable polypropylene sections (steel sections available) →			
Cutting Edge	← Replaceable steel →			
Broom RPM @ 10 GPM	168	← 145 →		



Optional Gutter Brush

Clean hard-to-reach areas — curbs, drainage depressions, alongside buildings — with the optional Bobcat gutter brush attachment. It widens the sweeper's total width by one foot, to let you cover more area per pass. Large, metal bristles produce excellent cleaning action. When not in use, the gutter brush can be raised and stored vertically. The gutter brush may be installed on either side of the sweeper.

Dimensions

- Gutter brush diameter: 24"
- Reach ahead of sweeper: 26"
- Reach to the side of sweeper: 14"
- Height from ground in sweeping position: 22"
- Height from ground in storage position: 51"

Only one gutter brush can be installed per sweeper. Gutter brush not approved for 463 and 553.

Clean Up in Forward or Reverse!

Now you can sweep, collect and dump dirt and other debris with just one attachment. Ideal for construction, industrial or municipal jobs, the Bobcat sweeper is easy to attach and simple to operate going either forward or reverse.

The hydraulically-driven attachment's reversible cutting edge helps cut loose caked-on mud. The sweeper's polypropylene bristles deposit dirt and other debris in the bucket, which can be dumped when full.* You can also use the sweeper to spread material evenly across a site.

The Bobcat sweeper is perfect to clean parking lots, sidewalks, docks, warehouses, and more. There are four sizes to fit a variety of Bobcat loader models.

*Lift restrictions may apply.

APPROVED AND NON-APPROVED LOADER-SWEEPER COMBINATIONS				
APPROVED	**APPROVED WITH LIFT RESTRICTIONS	NON-APPROVED		
SWEEPER WIDTH				
BOBCAT MODEL	44 INCH	54 INCH	60 INCH	72 INCH
* 463				
553		**LIFT RESTRICTION		
753, S130			**LIFT RESTRICTION	
763, S150, S160, 773, S175, S185, T180, T190				**LIFT RESTRICTION
863, 873, 883, S220, S250, S300, 963, A220, A300, T200, T300				

**Lift restriction requires that loaded sweeper not be lifted more than 3 feet (1 m.). Tipping can result.

* Sweeper attaches to 44 in. utility bucket.

NOTE - Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. Pictures of Bobcat units may show other than standard equipment. All dimensions are given for loader equipped with standard tires. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Bobcat Company complies with the requirements of ISO 9001 as registered with BSI.

The Bobcat Attachments Advantage: Bobcat attachments are engineered and manufactured to fit Bobcat loaders for optimum job performance, dependability and durability.

Bobcat Sweeper Attachment fits these carrier models:

Skid-Steer Loaders:

- 463
- 553
- 753
- 763
- S130
- S150
- S160
- 773
- S175
- S185
- 863
- 873
- 883
- S220
- S250
- S300
- 963

Compact Track Loaders:

- T180
- T190
- T200

All-Wheel Steer Loaders:

- A220
- A300

